


179.00 EUR  
incl. 19% VAT, plus [shipping](#)

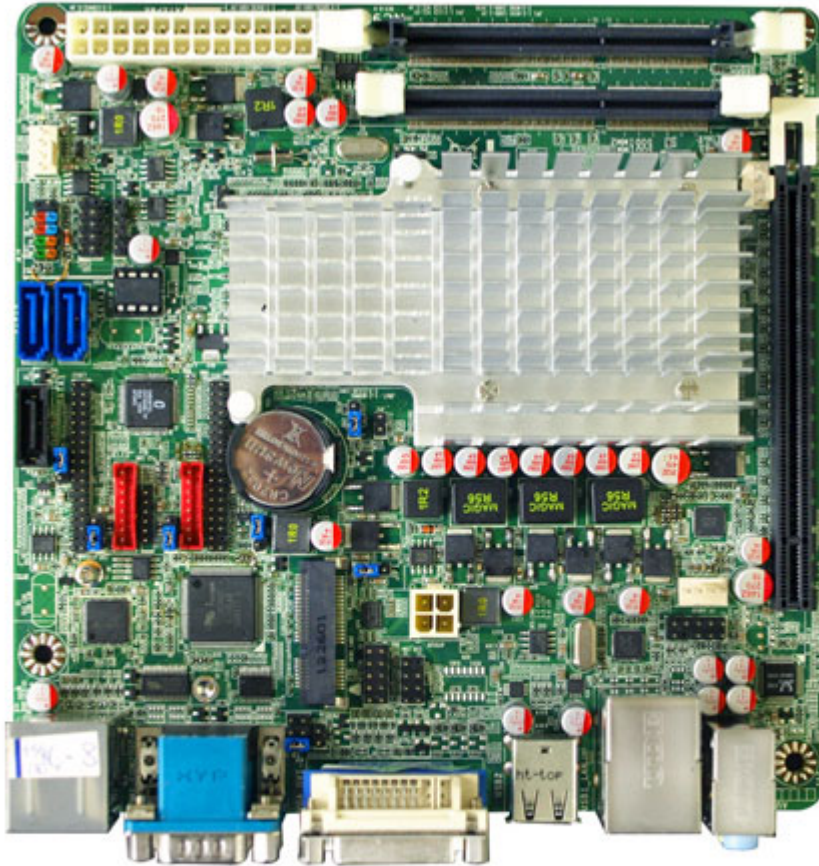

- INTEL® Celeron 847 Processor + NM70 Chipset
- Support 2 \* DDR3 1066/1333MHz Dual-channel up to 16GB
- Support DirectX 10.1, DirectX10, DirectX9 Graphics
- Support 2 \* Serial ATAII (3Gb/s) & 1 \* Serial ATAIII (6Gb/s) Devices
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- 2 \* 24 bits Dual Channel LVDS header
- Supports 1 \* Realtek RT8111F Gigabit LAN
- Support 2 \* COM ports (COM1 for RS232/422/485)
- Support Windows 8
- Support Watch dog Technology
- Support CPU Smart FAN
- Compliance with ErP standard
- Mini-ITX Form Factor (170mm x 170mm)

• <b>CPU</b>	• INTEL® Celeron 847 Dual Core Processor (1.1GHz)
• <b>Chipset</b>	• INTEL®NM70 Express chipset
• <b>Memory</b>	• 2 * DDR3 1066/1333MHz Dual-channel SO-DIMM up to 16GB
• <b>Expansion Slots</b>	• 1 * PCI -E x 16 slot • 1 * Mini PCI-E socket

• <b>Storage</b>	<ul style="list-style-type: none"> <li>• 2 * Serial ATA2 3Gb/s &amp; 1 * Serial ATA3 6Gb/s connectors</li> <li>• 1 * mSATA (Share with Mini PCI-E slot)</li> </ul>
• <b>Audio</b>	• Realtek ALC662 6-Channel HD Audio
• <b>Ethernet LAN</b>	• 1 * RTL8111F PCI-E Gigabit LAN
• <b>LVDS</b>	• Onboard 2 * 24-bits Dual channel connector
• <b>USB</b>	• Embedded 2 * USB 3.0 & 7 * USB 2.0/1.1
• <b>Special Features</b>	<ul style="list-style-type: none"> <li>• Support ACPI S3</li> <li>• Support CPU Smart FAN</li> <li>• Support Watch Dog</li> </ul>
• <b>Rear Panel I/O</b>	<ul style="list-style-type: none"> <li>• 2 * USB 3.0</li> <li>• 4 * USB 2.0/1.1 ports</li> <li>• 1 * RJ-45 port</li> <li>• 3 * Audio I/O ports ( Line-in, MIC and Line-out )</li> <li>• 1 * VGA port</li> <li>• 1 * DVI-D port</li> <li>• 1 * HDMI port</li> <li>• 2 * COM ports (COM1 for RS232/422/485)</li> </ul>
• <b>Internal I/O</b>	<ul style="list-style-type: none"> <li>• 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports</li> <li>• 1 * PS/2 Mouse &amp; 1 * Keyboard header</li> <li>• 2 * NB / Chassis Fan connectors;</li> <li>• 2 * LVDS headers / 2 * Inverter headers</li> <li>• 1 * AUDIO header</li> </ul>
• <b>BIOS</b>	• AMI 32MB UEFI DIP Flash ROM
• <b>Functional</b>	• ATM, Automation, Medical Equipment, Kiosk, Networking, POS, General Application, Transportation
• <b>Packing</b>	• Color Box Dimension ■200(W) x 200(D) x 70(H)mm
• <b>Certificate</b>	• CE, FCC, RoHS
• <b>Temperature</b>	<ul style="list-style-type: none"> <li>• Operating within 0~40 centigrade (<b>Suggest to use system FAN</b>)</li> <li>• Storage within -20-85 centigrade</li> </ul>
• <b>Form Factor</b>	• Mini ITX Form Factor(17cmx17cm)